


STREET DRAINAGE ELEVATION

NOT TO SCALE

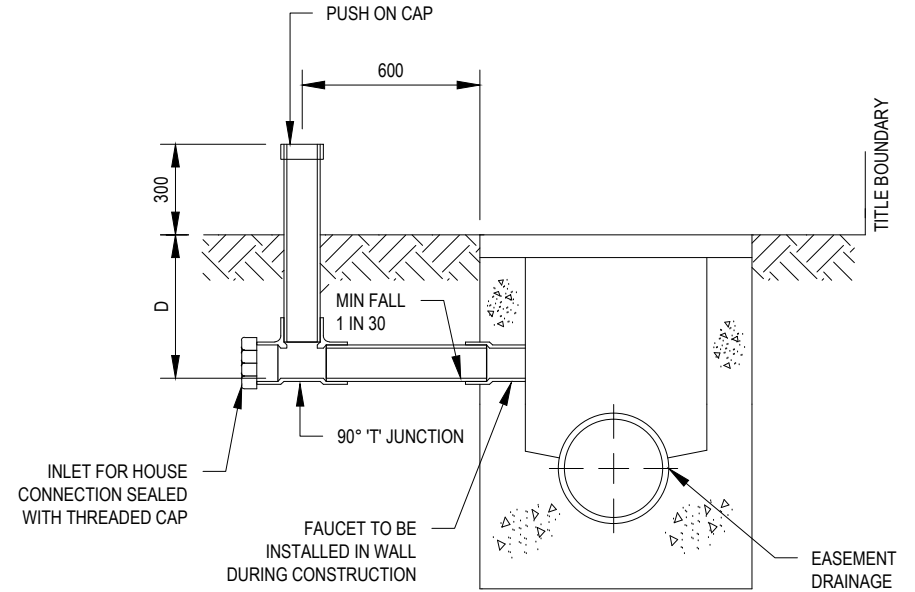

EASEMENT DRAINAGE ELEVATION

NOT TO SCALE

NOTES:

1. ALL PIPES AND FITTINGS TO BE OF 100mm PVC CLASS SN6, REFER AS 1260.
2. ALL PVC JOINTS TO BE SEALED WITH SOLVENT CEMENT OR RUBBER RING JOINTS.
3. DEPTH 'D' = 400mm MINIMUM UNLESS APPROVED BY COUNCIL.
4. BED PROPERTY CONNECTION PIPE ON 50MM COMPACTED 20mm CLASS 3 CRUSHED ROCK OR CLASS 3 CRUSHED CONCRETE.
5. BACKFILL TRENCH WITH CLASS 3 20mm CRUSHED ROCK OR CLASS 3 20mm CRUSHED CONCRETE TO 100mm ABOVE THE PROPERTY CONNECTION PIPE IN EASEMENTS AND UNPAVED AREAS AND TO SUBGRADE LEVEL UNDER FOOTPATHS AND PAVED AREAS.
6. TRENCH UNDER FOOTPATH TO BE BACKFILLED WITH COMPACTED 20MM CLASS 3 CRUSHED ROCK.
7. IF THE HOLE IN THE PIT WALL FOR THE PIPE IS NOT AVAILABLE, A HOLE IS TO BE CORE DRILLED.
8. ALL DIMENSIONS IN MILLIMETRES OR AS NOTED OTHERWISE.
9. REFER TO EDCM 605-609 FOR PIT DETAILS.

No	Revision	Note: * indicates signatures on original issue of drawing or last revision of drawing	Drawn	Checked	Approved	Date
0	FINAL ISSUE		DG	MM	-	16.11.15

Plot Date: 16 November 2015 - 4:20 PM Plotted by: Kerry Walton

Cad File No: Q:\Infrastructure Planning\EDCM Standard Drawings\EDCM - 703.dwg



STANDARD DRAWINGS FOR
SUBDIVISIONS IN GROWTH AREAS
**PROPERTY INLET
TYPE C**

Revision | 0
Date | DEC 2015
EDCM 703