


STONE WALL DEMOLITION AND RECONSTRUCTION PLAN



STONE WALL DEMOLITION AND RECONSTRUCTION DETAIL

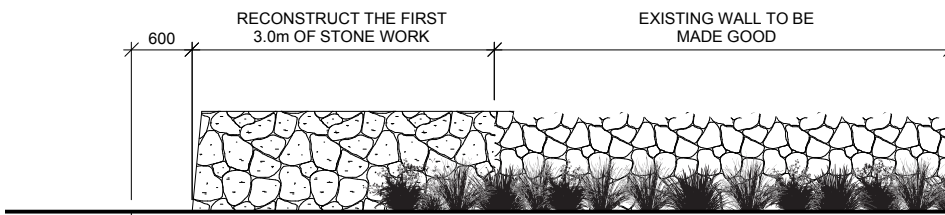

NOTES:

1. As a minimum requirement stone, rock and boulders shall:
 - Be sound and free from defects that may affect strength, appearance and durability. Stone with cut and broken faces or undesirable markings shall not be incorporated into finished surfaces.
 - Be of an appropriate colour and quality to ensure a uniform finish (ie ensure the variation in colour and texture are distributed throughout the finished surface to avoid concentrations of similar variations and colours).
 - Be installed level and embedded to ensure that the stone is stable and free of movement.
2. To discourage direct access to original sections of dry stone wall, a dense vegetation buffer shall be installed to minimise both intentional and unintentional damage and disturbance to the wall. Buffer planting shall:
 - Be a minimum of 2.5 metres in width and generally comprise a density of 5 plants per square metre supplied in tube containers (dense plant out rate).
 - Comprise robust plant species of a height and form that will not restrict views towards or conceal the stone wall. Plantings shall compliment and frame adjacent walls and not detract from the visual amenity and character of the wall.
 - Specify plant species that have a growth characteristic that will not adversely impact the structural integrity of the adjacent wall.

Note: All stonework shall be undertaken by a suitably qualified and experienced stone mason or landscape contractor.

REFER SDL.9.03 FOR ADDITIONAL NOTES

STANDARD DETAIL

PARKS & OPEN SPACE LANDSCAPE CONSTRUCTION DETAILS

Date: 3 November 2014
Revision: A