


OPEN INVERT CROSSING  
(TO INTERSECT WITH 600-WIDTH BARRIER KERB & CHANNEL)

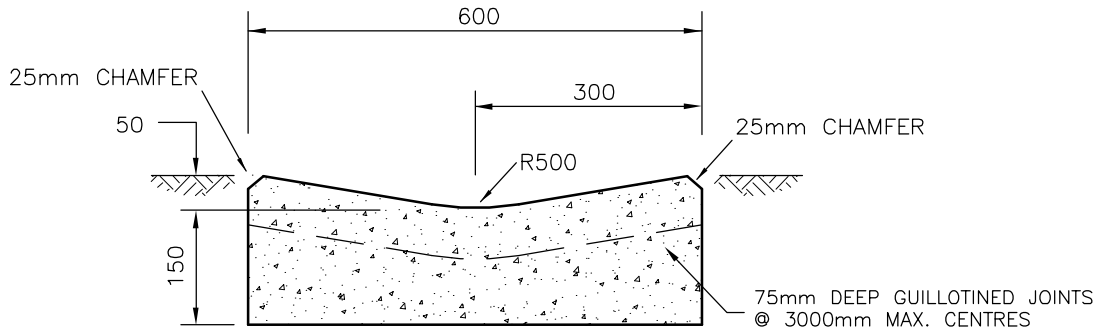

OPEN INVERT CROSSING  
(TO INTERSECT WITH SEMI-MOUNTABLE (MODIFIED) KERB & CHANNEL)

NOTES

1. \*Tray width may be reduced to match existing conditions.
2. When placed by hand, all concrete shall be compacted with the aid of immersion vibrators or other vibrating equipment as approved by the superintendent.
3. Concrete shall be 25 MPa minimum.
4. Channel Crossings to be poured integrally with kerb and channel construction.



City of Whittlesea

CHANNEL CROSSINGS

SD 303

APPROVED

*Neil Hooley*

DATE 01/03/06

REV B